

TWO COMMERCIAL TOP BRACKETS FASTENED TO END STILE W (8) 1/4" x 3/4" TEK SCREWS



20 GA. 4" C-CHANNEL TRUSS W/ 1/4" X 3/4" TEK SCREWS

INSIDE FACE OF STILE

TONGUE AND GROOVE SEAL

SINGLE CONTACT VINYL WEATHER SEAL

SECTION A-A






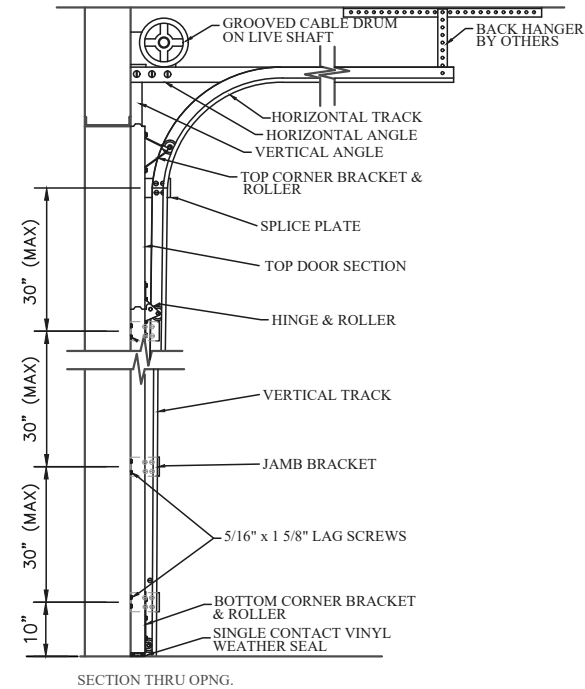
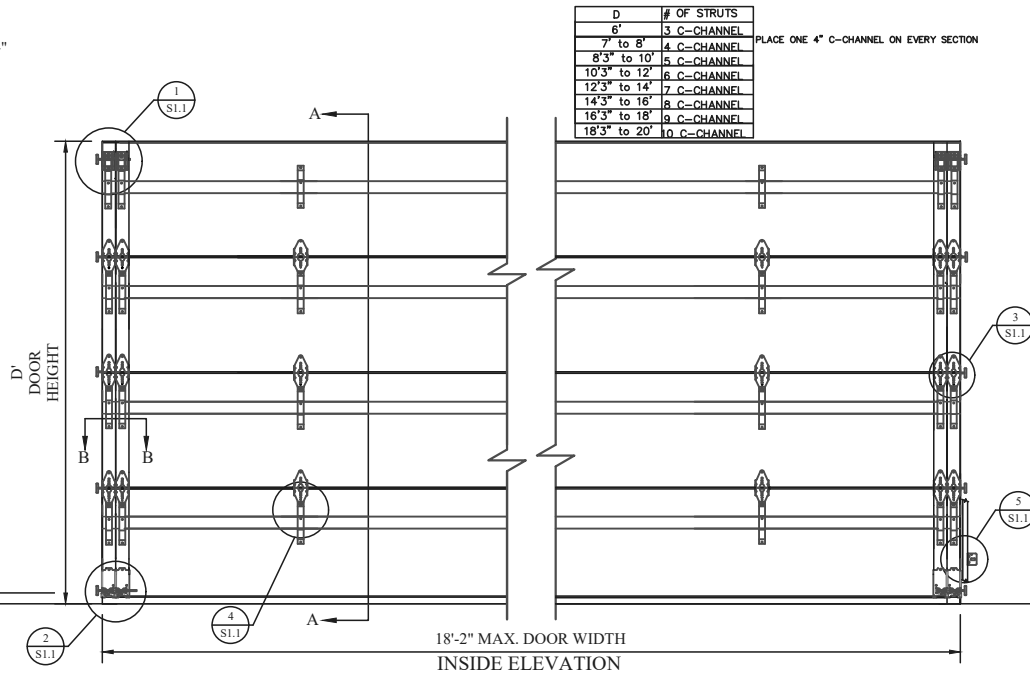


NOTES:

\* DOORS & HARDWARE WILL BE DESIGNED & MANUFACTURED & INSTALLED ACCORDING TO STANDARDS ESTABLISHED BY THE DOOR ACCESS SYSTEMS MANUFACTURING ASSOCIATION (DASMA).

\* IN DOOR SECTIONS WHERE WINDOW LITES ARE INSTALLED, STRUTS MAY BE RELOCATED OVER HINGE LEAFS TO AVOID OBSTRUCTION.


\* AN INSIDE SLIDE LOCK SHOULD BE MOUNTED ON END STILE APPROXIMATELY 31" FROM BOTTOM OF DOOR ON THE INTERIOR LEFT.

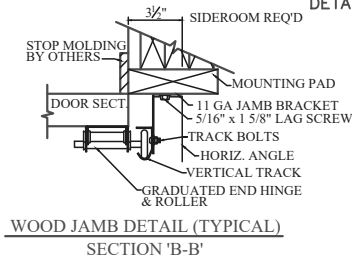

MODELS: ALL 2" MODELS

DESIGN PRESSURE +16.5/-18.4 PSF  
EXPOSURE C  
TESTED PER THE APPLICABLE REQUIREMENTS OF:  
ASTM: E 330 ANSI/DASMA 108-2002

NOTE: THE DESIGN OF SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE IN ACCORDANCE WITH CURRENT BUILDING CODES

 <b>BEMIDJ, MN 58601</b>	<b>ENGINEERING DRAWING</b>	
	<b>TITLE</b>	
<b>18'-2" MAX. WIDTH, WIND LOAD RATED DOOR</b>		
<b>MODEL #</b> TF-II, TR-II, LP-II, AR-II, ARL-II, SR-II	<b>REV. NO.</b>	<b>0</b>
<b>SCALE</b> - N/A	<b>SHEET</b>	<b>OF</b>
	<b>DATE</b>	