



North Central Door
BY GARAGA

Signature quality and innovation since 1966.

**RESIDENTIAL
CARRIAGE HOUSE DOORS**
SR-138, SR-II

SPECIAL RESERVE



SR-84 in sandstone with stockbridge windows

With classic beauty, durability and thermal efficiency, your home will be

The Talk of the Town!

TIMELESS. BEAUTIFUL. DEPENDABLE. | northcentraldoor.com

SPECIAL RESERVE OPTIONS

Customizing your Special Reserve door is easy...



Custom Creation: Shown in Sandstone with Stockton windows

- ① Select the style, or create your own design
- ② Select the overlay option
- ③ Select the windows
- ④ Select the color

Add decorative hardware and your door is finished.

<p>Style Options</p>	<p>SR-81 SR-82 SR-83 SR-84</p> <p>SR-85 SR-86</p> <p>Make your own custom creation!</p>
<p>Overlay Options</p>	<p>SMOOTH WOODGRAIN</p> <p>Overlay board color is white only for all door color options below. Overlay may be custom painted, subject to painting guidelines.</p>
<p>Window Options*</p>	<p>PLAIN LONG PANEL HERITAGE STOCKBRIDGE</p> <p>STOCKTON WYNDBRIDGE</p> <p>*For double width doors, additional designs available.</p>
<p>Color Options</p>	<p>WHITE ALMOND SANDSTONE BEIGE EARTHTONE SEPIA</p> <p>BROWN GREEN BLACK</p> <p>Paint your own custom color! (subject to painting guidelines)</p>
<p>Hardware Options</p>	<p>STRAP HINGE DOOR STUD LIFT HANDLE</p>

CLASSIC IN STYLE. INNOVATIVE IN DESIGN.



Nothing says **Welcome Home** like our Special Reserve Doors

We've taken the timeless beauty of carriage house garage doors and combined it with the latest in design engineering to create a door that will be as durable as it is beautiful.

With six distinctive styles, nine classic colors and your choice of windows, you'll be able to create the perfect look to complement your home's architectural style and make it uniquely yours.



What makes the Special Reserve Series a step above the rest is our craftsmanship. Created from our popular TF-138 or TF-11 thermal doors, we add a decorative overlay to create a genuine carriage house look. Made of 26-gauge steel, our doors are durable to the core. Insulated to keep your home thermally efficient year round, the unique thermal barrier helps guard against the elements. And, our quality finishing process creates a clean look on the inside as well as the outside using a two-coat polyester paint finish for maximum durability. The result is a maintenance-free door with a classic look that's all your own.

SPECIAL RESERVE PRODUCT INFORMATION



SR-82 in white with stockbridge windows

ADDITIONAL FEATURES


- Woodgrain embossed, hot-dipped galvanized steel is pre-finished exterior & interior then coated with baked-on polyester primer and acrylic finish.
- Wind load package available.
- Keyed or slide lock set.
- 10 ball rollers for quiet operation.
- Available with insulated glass only.
- Environmentally friendly polystyrene insulation.

WHY CHOOSE NORTH CENTRAL DOOR?

North Central Door Company understands that you have high standards when it comes to enhancing the appearance of your home. That is why we have been uncompromising in maintaining the high quality of our products since our beginning in 1966.

Please note: If painting your Special Reserve door, use a latex paint with a Light Reflective Value (LRV) of more than 36, or a color on a vinyl safe color palette with a LRV of more than 15. For custom matched colors with a LRV less than 36 or vinyl safe color palette LRV of less than 15, use AquaSurTech heat reflective paint applied by a professional painter. **Failure to follow these guidelines may result in significant damage and will void warranty.**

CONSTRUCTION

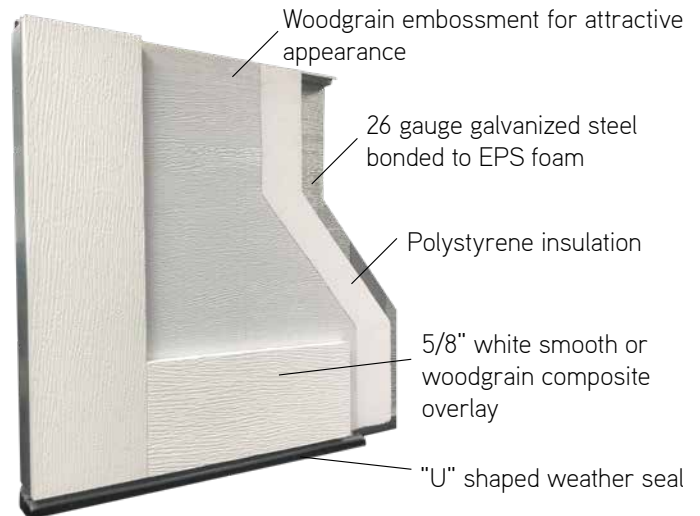

- 1 3/8" or 2" insulated steel flush sandwich door with decorative overlay.
- Polystyrene insulation bonded to 26-gauge steel skin providing thermal protection to the edge of each section.
- Uniquely designed tongue & groove section joints create a weather-resistant seal against rain, snow & wind.
- Durable PVC seals provide a continuous thermal break on all section joints, reducing thermal transmissions.
- 18-gauge hot-dipped galvanized stiles are carried the full height of the sections providing superior strength & durability compared with commonly used hinge pads.
- Hinges are 14-gauge, hot-dipped galvanized steel for lasting durability.
- Aluminum weather seal retainer is corrosion resistant.
- Heavy-duty "U" shaped bottom weather seal helps protect against elements.
- R-values per section thickness: 1 3/8" = 6.6, 2" = 8.5

For complete specifications, visit northcentraldoor.com

Distributed By:



As NCDC continuously strives to improve our products, all specifications listed on this brochure are subject to change without notice or obligation.

NCDC041425



North Central Door
BY GARAGA

northcentraldoor.com